

# **Observations of Velocity Fields Under Moderately Forced Wind Waves**

Timothy P. Stanton  
Oceanography Department, Code OC/ST  
Naval Postgraduate School  
Monterey, CA 93943-5000  
phone: (831) 656 3144 fax: (831) 656 2712 email: [stanton@nps.navy.mil](mailto:stanton@nps.navy.mil)

Award#: N0001401WR20043  
<http://www.oc.nps.navy.mil/~stanton/CBLAST/>

## **LONG TERM GOALS**

Long term goals are to observe and model turbulent transfer of momentum and heat between the atmosphere and ocean in the presence of surface gravity waves. Surface gravity waves play a unique role in the coupling of wind stress into the ocean mixed layer as they gather wind kinetic energy and deliver momentum to the ocean interior through several mechanisms, including micro breaking and full wave breaking. The resulting momentum transfers have both continuous stress components and highly episodic, strong events which significantly effect vertical distribution of kinetic energy dissipation and turbulent stress in the water column.

## **OBJECTIVES**

The primary scientific objective of this project is to measure the turbulent stresses, shear and kinetic energy dissipation rates in the crest-trough region of wind forced surface gravity waves. It is crucial to measure these properties right up to the wave surface as micro-breaking and gentle spilling breaking events produce disturbances in the water column that change rapidly with distance from the wave surface, and are suspected to generate coherent rotational flows immediately below the surface. Separating out small turbulent signatures from the large amplitude, mostly irrotational flow under ocean waves presents a significant observational challenge. Consequently this study is focused on moderately forced local wind waves, with 10m height winds ranging from  $4\text{-}10\text{ms}^{-1}$  in ocean environments with low swell climates. Detailed near-surface observations over this range of wind forcing, which spans the transition into wave breaking, will be used to evaluate the role of competing momentum transfer processes in order to formulate improved parameterizations of wind stress transfer into the ocean mixed layer.

## **APPROACH**

While many of the hypotheses for stress transfer under wind waves have been developed from controlled laboratory experiments, the approach taken here is to make direct, noninvasive measurements of the velocity structure under oceanic wind waves without the restrictions imposed by laboratory tanks. Field observations of sub-wave velocity profiles, 2D wave slope and local wave breaking will be made over differing wind and wave conditions at sites with minimal swell, to measure the response of the near-surface ocean to the wind forcing. In laboratory tank experiments phase averaging techniques, where nearly identical surface waves are propagated through the tank, allow turbulent motions to be separated from wave motions by ensemble averaging of the flow fields. Since

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>30 SEP 2001</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2001 to 00-00-2001</b>	
4. TITLE AND SUBTITLE <b>Observations of Velocity Fields Under Moderately Forced Wind Waves</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Oceanography Department, Code OC/ST,,Naval Postgraduate School,,Monterey,,CA, 93943</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>Long term goals are to observe and model turbulent transfer of momentum and heat between the atmosphere and ocean in the presence of surface gravity waves. Surface gravity waves play a unique role in the coupling of wind stress into the ocean mixed layer as they gather wind kinetic energy and deliver momentum to the ocean interior through several mechanisms, including micro breaking and full wave breaking. The resulting momentum transfers have both continuous stress components and highly episodic, strong events which significantly effect vertical distribution of kinetic energy dissipation and turbulent stress in the water column.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>5</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

this important analysis technique is not available in field observations under truly random wave fields, other techniques are being used to identify turbulent momentum fluxes below the waves.

A unique high resolution Bistatic Coherent Doppler Velocity Profiler (BCDVP) developed in my research group at NPS (Stanton 1996, 2001a, b) is being used to measure 1 cm-resolution profiles of three component velocity vectors and backscatter levels over a 1.2m vertical span immediately below the water surface under wind waves. The bistatic geometry provides a small sample volume, determined by the short acoustic pulse length and narrow transmitter beamwidth, to determine the 3 component velocity vector and backscatter level at each range bin through the water column. This small (2 cm diameter, 1.5cm high) sample volume is critical when sampling close to the highly curved wave surface (and resulting velocity field) immediately below wind waves. The continuous, dense, profile of velocity vectors allow Reynolds stresses to be estimated through the water column in a surface-following coordinate system.

These measurements will be made from a deep water coastal tower south of Marthas Vineyard during the summer of 2002 as a component of the CBLAST Low Wind experiment (<http://www.whoi.edu/science/AOPE/dept/CBLAST/lowwind.html>). The sub-wave observations will be made in the context of comprehensive wind profile measurements and vector velocity measurements in the mixed layer and pycnocline being measured by other CBLAST investigators. I will also deploy a 5 beam ADCP at the base of the observation tower to measure Langmuir circulation signatures deeper in the mixed layer in collaboration with side scan measurements of larger scale coherent structures being made by Al Pludemann. Preliminary sub-wave observations are currently being made at a site outside the surf zone in Monterey Bay.

## WORK COMPLETED


During this first year of the program, the effort has been focused on instrumentation and development of data processing and analysis techniques. A wide baseline BCDVP instrument is being constructed to provide a more optimal geometry for this application, and a data concentrator / power distribution module has been constructed to be compatible with both the Martha's Vineyard tower and local experiments in Monterey Bay. This system is based on hardware used in SHOWEX and MISO with the addition of a single mode fiber video link and internal digital imaging capabilities to measure local wave slopes and wave breaking.

Analysis techniques have been developed to robustly estimate Reynolds stresses in a surface following coordinate system in the presence of large amplitude irrotational wave motions. These methods are being applied to BCDVP data gathered in Monterey Bay field trials that use a portable frame deployed outside the surf zone in 3m nominal depth, typically for 24 hour periods.

## RESULTS

A portable frame and fiber optic/power cable link supporting components of the sub-surface velocity field measurement system has been completed. The BCDVP has been used to measure the velocity fields using a non-optimal configuration at a site dominated by wind waves, providing data sets to develop processing techniques for the velocity profiles. Techniques to minimize the contribution of large irrotational flow components in the estimation of the turbulent stress timeseries  $\rho \langle u'w' \rangle(z_\eta, t)$  and  $\rho \langle v'w' \rangle(z_\eta, t)$ , where  $z_\eta$  is the distance down from the wave surface, are being used to identify stress events associated with incipient and spilling breaking. The  $\eta$ -following reference frame allows Reynolds averages of these stress timeseries to be formed over appropriate averaging times to within 1

cm of the surface despite the large vertical excursion of the surface. An example of a 16 second subsurface section of BCDVP observations in Figure 1 illustrates the high resolution

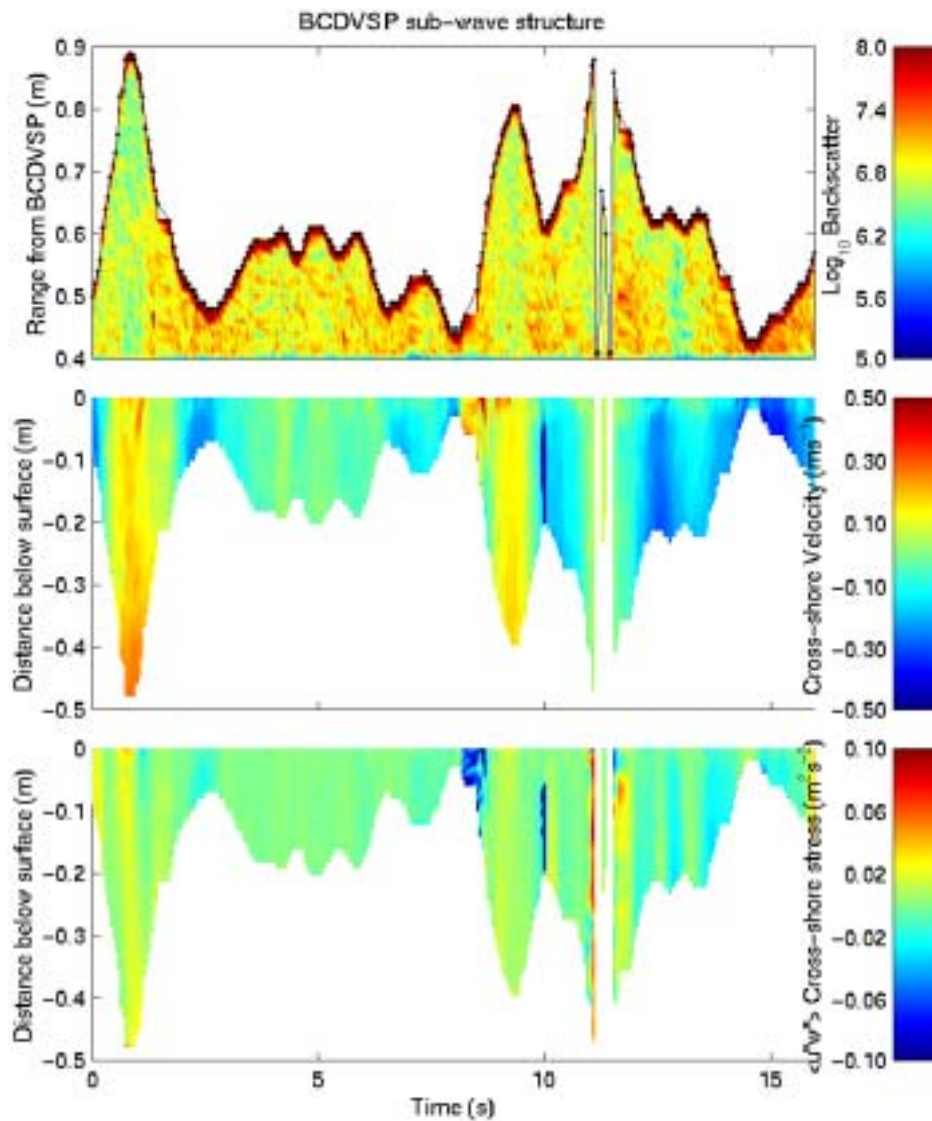

*Figure 1. A 12 second profile timeseries of shows  $\log_{10}$  backscatter levels (upper panel), cross-shore velocity (middle panel), and  $\langle u'w' \rangle$  (lower panel). The middle and lower panels are mapped in a surface-following coordinate system.*

measurements below small wind waves. In this deployment the total range was limited to 50cm, and consequently the wave amplitude frequently exceeded the measurement range. The upper panel shows  $\log_{10}$  backscatter levels, which result from organic scatterers and small bubbles in the water column, with the z axis extending up from the instrument face. The following two panels show the cross-shore velocity component and  $\langle u'w' \rangle$  turbulent velocity correlation profile timeseries, both in a surface-following coordinate system. At t=8 seconds, on the leading face of the wave, the cross-shore velocity (and vertical, longshore components, not shown) appears strongly structured and there is a corresponding rapid magnitude increase in cross-shore stress. These large episodic stress events were seen throughout the one hour observation and were visually correlated with gently spilling breaking waves.

## **IMPACTS / APPLICATIONS**

Improved observations of the processes responsible for stress transfer into the ocean wind momentum transfer into the ocean have broad application to air-sea interaction and gas exchange studies. There is a clear need for improved drag coefficient parameterizations, in both atmospheric and oceanic models, particularly in very high resolution littoral modeling efforts including COAMPS.

## **RELATED PROJECTS**

This research is closely coordinated with other CBLAST investigators including Jim Edson (atmospheric boundary layer), Al Pludemann (Langmuir circulations), Jean Terray and John Towbridge (mixed layer velocities), Chris Zappa (surface thermal signatures) and Brain Ward (Near surface temperature gradients and stratification).

## **REFERENCES**

Stanton, T. P., 1996. Probing ocean wave boundary layers with a hybrid bistatic / monostatic Coherent Acoustic Doppler Profiler. Proceedings of the Microstructure Sensors in the Ocean Workshop, Mt Hood, October 1996.

Stanton, T. P., 2001a. High resolution acoustic doppler profiling of velocity, Reynolds stresses and sediment concentration in wave forced boundary layers. Submitted to J. Atmos. and Oceanic Technol.

Stanton, T. P., 2001b. A Turbulence-Resolving Coherent Acoustic Sediment Flux Probe Device and Method For Using. US Patent 6,262,942, issued 17 July 2001.

Website: <http://www.oc.nps.navy.mil/~stanton/cblast/>

## **PATENTS**

Stanton, T. P., 2001. A Turbulence-Resolving Coherent Acoustic Sediment Flux Probe Device and Method For Using. US Patent 6,262,942, issued 17 July 2001.